



Materiale: bronzo e grafite
Material: bronze graphite
Werkstoff: bronze graphit

Durezza: HB 210÷240
Hardness:
Härte:

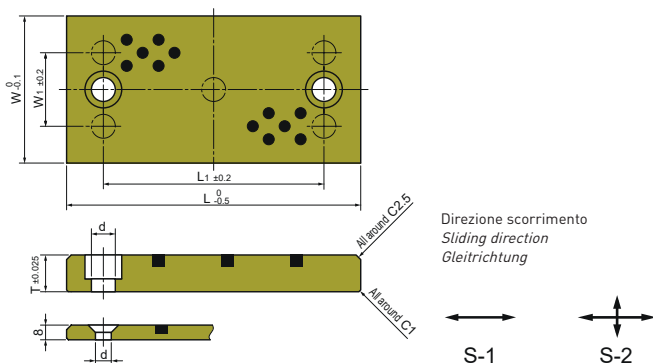

Posizione fori / hole position / loch position



Codice	T	L	W	W1	L1	Nr. viti Nr. screw	Viti DIN912	Posiz. fori Holes posit.	Dir. scorrimento Sliding direction
SOD-301	8	100	40	-	60	2	M8	A	S-1
SOD-302		160	40	-	120	2		A	S-1
SOD-303		250	40	-	210	3		C	S-1
SOD-304	12	100	30	-	60	2	M8	A	S-1
SOD-305		160	30	-	120	2		A	S-1
SOD-306		250	30	-	210	3		C	S-1
SOD-307		100	40	-	60	2		A	S-1
SOD-308		160	40	-	120	2		A	S-1
SOD-309		250	40	-	210	3		C	S-1
SOD-310		100	80	40	60	2		B	S-2
SOD-311		160	80	40	120	4		E	S-2
SOD-312		250	80	40	210	5		F	S-1
SOD-313		100	40	-	60	2		A	S-1
SOD-314	160	40	-	120	2	A	S-1		
SOD-315	250	40	-	210	3	C	S-1		
SOD-316	100	60	30	60	2	B	S-2		
SOD-317	16	160	60	30	120	2	M10	B	S-1
SOD-318		250	60	30	210	3		D	S-1
SOD-319		100	100	60	60	2		B	S-2
SOD-320		160	100	60	120	4		E	S-2
SOD-321	250	100	60	210	6	G	S-1		
SOD-322	20	100	50	20	60	2	M12	B	S-1
SOD-323		160	50	20	120	2		B	S-1
SOD-324		250	50	20	210	3		D	S-1
SOD-325		100	80	40	60	2		B	S-2
SOD-326		160	80	40	120	4		E	S-2
SOD-327		250	80	40	210	5		F	S-1
SOD-328		100	125	85	60	4		E	S-2
SOD-329		160	125	85	120	4		E	S-2
SOD-330		250	125	85	210	6		G	S-1

Esempio d'ordine: Codice
Order example:
Bestellbeispiel: