


Double swivel ring
Doppelwirbelring



DSR

ANELLO CON DOPPIA ARTICOLAZIONE

Giu 2023

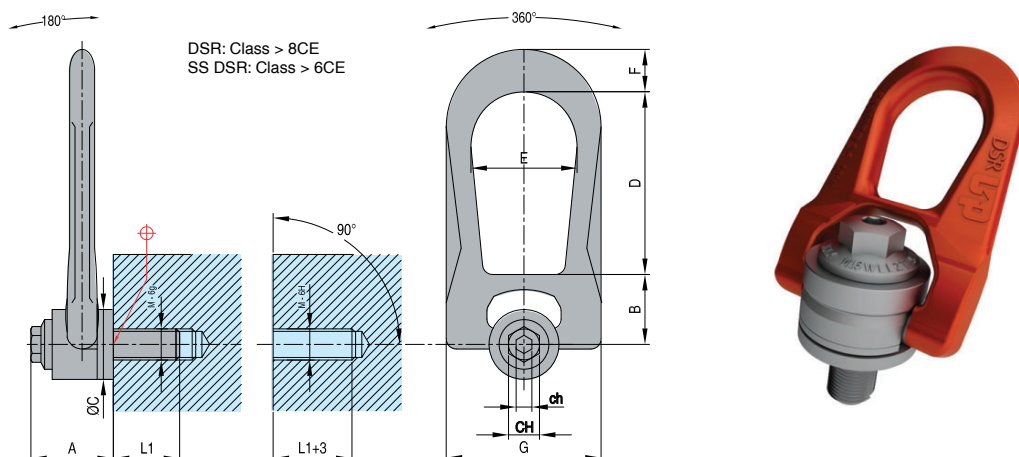

Codice	SF 5:1 (t) W.L.L.	SF 4:1 (t) W.L.L.	M Ø	TL (Nm)	Dimensioni / <i>Dimensions</i> (mm)										Peso <i>Weight</i> (Kg)
	L1	ch			CH	A	B	C Ø	D	E	F	G			
DSR-M05	0,07	0,10	M5 (x0,8)	3	15	8									
DSR-M06	0,15	0,20	M6 (x1)	4	15										
DSR-M08	0,40	0,50	M8 (x1,25)	6	15		16	33	30	30	38	27	14	53	0,3
DSR-M10	0,70	0,90	M10 (x1,50)	10	18										
DSR-M12	1,05	1,30	M12 (x1,75)	15	21	14									
DSR-M14	1,40	1,80	M14 (x2)	30	23										
DSR-M16	2	2,30	M16 (x2)	50	27		20	45	40	45	53	38	17	76	0,9
DSR-M18	2,30	2,30	M18 (x2,5)	70	27										
DSR-M20	2,50	2,50	M20 (x2,5)	100	30	14									
DSR-M22	3,50	4,50	M22 (x2,5)	120	33										
DSR-M24	4,40	5,50	M24 (x3)	160	36		24	62	55	60	83	55	25	115	2,6
DSR-M27	5,70	6	M27 (x3)	200	40										
DSR-M30	6	6,30	M30 (x3,5)	250	45										
DSR-M36	8	8,50	M36 (x4)	320	54	14	30	80	77	78	98	71	26	141	5,4
DSR-M42	8,50	9	M42 (x4,5)	400	63										

Acciaio Inox

Codice	SF 5:1 (t) W.L.L.	SF 4:1 (t) W.L.L.	M Ø	TL (Nm)	Dimensioni / <i>Dimensions</i> (mm)										Peso <i>Weight</i> (Kg)
	L1	ch			CH	A	B	C Ø	D	E	F	G			
SSDSR-M06	0,10	0,15	M6 (x1)	4	15	8	16	32	30	30	39	28	13	53	0,3
SSDSR-M08	0,30	0,30	M8 (x1,25)	6	16										
SSDSR-M10	0,50	0,50	M10 (x1,50)	10	16										
SSDSR-M12	0,80	0,80	M12 (x1,75)	15	19										
SSDSR-M14	1	1	M14 (x2)	30	29	14	20	44	40	45	53	38	17	76	0,9
SSDSR-M16	1,40	1,50	M16 (x2)	50	26										
SSDSR-M18	1,40	1,50	M18 (2,5)	70	30										
SSDSR-M20	1,40	1,60	M20 (x2,5)	100	30										
SSDSR-M22	2,20	2,20	M22 (x2,5)	120	42	14	24	62	55	58	83	56	25	115	2,5
SSDSR-M24	2,70	2,70	M24 (x3)	160	42										
SSDSR-M27	2,80	2,90	M27 (x3)	200	42										
SSDSR-M30	3	3,50	M30 (x3,5)	250	47										

SF 5:1= coefficiente di sicurezza (in tonnellate)

SF 4:1= coefficiente di sicurezza (in tonnellate)

TL=coppia di serraggio raccomandata in Newton/metri

Esempio d'ordine: Codice

Order example:

Bestellbeispiel: